

DICOM Conformance Statement

teamplay query/retrieve





1 DICOM Conformance Statement Overview

The *teamplay Q/R* is designed to be integrated into an environment of medical, DICOM-based devices. The teamplay Receiver supports Storage of images utilizing the DICOM "Storage Service Class" and the retrieval of images from DICOM Archives utilizing the DICOM "Query/Retrieve Service Class".

The teamplay Q/R provides an AET for the analytics offering functionality.

The default AET is TEAMPLAY.

It is possible to change the configuration of the AET.

The teamplay Q/R offerings AE teamplay provides the following functionality:

- Receive DICOM objects from service class users
- Query remote nodes for objects based on Study Root Model and retrieve them.
- Receive data and optionally deidentifies it.

The *teamplay Q/R* conforms to the DICOM Standard and supports the network services as described in Table 1: Network Services and the media services as described in Media Services.

Table 1: Network Services

SOP Classes	SOP Class UID User of Service (SCU)		Provider of Service (SCP)			
Verification						
Verification	1.2.840.10008.1.1	Ye	es	Yes		
	SOP Classes created by tea	mplay Recei	ver	•		
		Create	Send	Store	Display	
	None					
	SOP Classes managed by te	amplay Rece	iver		_	
Computed Radiography Image Storage	1.2.840.10008.5.1.4.1.1.1	No	No	Yes	No	
Digital X-Ray Image Storage - For Presentation	1.2.840.10008.5.1.4.1.1.1.1	No	No	Yes	No	
Digital X-Ray Image Storage – For Processing	1.2.840.10008.5.1.4.1.1.1.1.1	No	No	Yes	No	
Digital Mammography X-Ray Image Storage – For Presen- tation	1.2.840.10008.5.1.4.1.1.1.2	No	No	Yes	No	
Digital Mammography X-Ray Image Storage – For Pro- cessing	1.2.840.10008.5.1.4.1.1.1.2.1	No	No	Yes	No	
CT Image Storage	1.2.840.10008.5.1.4.1.1.2	No	No	Yes	No	
Enhanced CT Image Storage	1.2.840.10008.5.1.4.1.1.2.1	No	No	Yes	No	
Ultrasound Multi-frame Image Storage	1.2.840.10008.5.1.4.1.1.3.1	No	No	Yes	No	
MR Image Storage	1.2.840.10008.5.1.4.1.1.4	No	No	Yes	No	
Enhanced MR Image Storage	1.2.840.10008.5.1.4.1.1.4.1	No	No	Yes	No	
MR Spectroscopy Storage	1.2.840.10008.5.1.4.1.1.4.2	No	No	Yes	No	
Enhanced MR Color Image Storage	1.2.840.10008.5.1.4.1.1.4.3	No	No	Yes	No	
Ultrasound Image Storage	1.2.840.10008.5.1.4.1.1.6.1	No	No	Yes	No	
Secondary Capture Image Storage	1.2.840.10008.5.1.4.1.1.7	No	No	Yes	No	
Multi-frame Single Bit Sec- ondary Capture Image Stor- age	1.2.840.10008.5.1.4.1.1.7.1	No	No	Yes	No	



SOP Classes	SOP Class UID		Service CU)	Provider of Service (SCP)	
Multi-frame Grayscale Byte Secondary Capture Image Storage	1.2.840.10008.5.1.4.1.1.7.2	No	No	Yes	No
Multi-frame Grayscale Word Secondary Capture Image Storage	1.2.840.10008.5.1.4.1.1.7.3	No	No	Yes	No
Multi-frame True Color Sec- ondary Capture Image Stor- age	1.2.840.10008.5.1.4.1.1.7.4	No	No	Yes	No
12-lead ECG Waveform Storage	1.2.840.10008.5.1.4.1.1.9.1.1	No	No	Yes	No
General ECG Waveform Storage	1.2.840.10008.5.1.4.1.1.9.1.2	No	No	Yes	No
Storage	1.2.840.10008.5.1.4.1.1.9.1.3	No	No	Yes	No
Hemodynamic Waveform Storage	1.2.840.10008.5.1.4.1.1.9.2.1	No	No	Yes	No
Cardiac Electrophysiology Waveform Storage	1.2.840.10008.5.1.4.1.1.9.3.1	No	No	Yes	No
Grayscale Softcopy Presenta- tion State Storage	1.2.840.10008.5.1.4.1.1.11.1	No	No	Yes	No
Color Softcopy Presentation State Storage SOP Class	1.2.840.10008.5.1.4.1.1.11.2	No	No	Yes	No
Pseudo-Color Softcopy Presentation State Storage SOP Class	1.2.840.10008.5.1.4.1.1.11.3	No	No	Yes	No
Blending Softcopy Presenta- tion State Storage	1.2.840.10008.5.1.4.1.1.11.4	No	No	Yes	No
X-Ray Angiographic Image Storage	1.2.840.10008.5.1.4.1.1.12.1	No	No	Yes	No
Enhanced XA Image Storage	1.2.840.10008.5.1.4.1.1.12.1.1	No	No	Yes	No
X-Ray Radiofluoroscopic Image Storage	1.2.840.10008.5.1.4.1.1.12.2	No	No	Yes	No
Enhanced XRF Image Storage	1.2.840.10008.5.1.4.1.1.12.2.1	No	No	Yes	No
X-Ray 3D Angiographic Im- age Storage	1.2.840.10008.5.1.4.1.1.13.1.1	No	No	Yes	No
X-Ray 3D Craniofacial Image Storage	1.2.840.10008.5.1.4.1.1.13.1.2	No	No	Yes	No
Breast Tomosynthesis Image Storage	1.2.840.10008.5.1.4.1.1.13.1.3	No	No	Yes	No
Raw Data Storage	1.2.840.10008.5.1.4.1.1.66	No	No	Yes	No
Spatial Registration Storage	1.2.840.10008.5.1.4.1.1.66.1	No	No	Yes	No
Spatial Fiducials Storage	1.2.840.10008.5.1.4.1.1.66.2	No	No	Yes	No
Deformable Spatial Registra- tion SOP Class	1.2.840.10008.5.1.4.1.1.66.3	No	No	Yes	No
Segmentation Storage	1.2.840.10008.5.1.4.1.1.66.4	No	No	Yes	No
Surface Segmentation Storage	1.2.840.10008.5.1.4.1.1.66.5	No	No	Yes	No
Real World Value Mapping Storage	1.2.840.10008.5.1.4.1.1.67	No	No	Yes	No
Basic Text SR Storage	1.2.840.10008.5.1.4.1.1.88.11	No	No	Yes	No
Enhanced SR Storage	1.2.840.10008.5.1.4.1.1.88.22	No	No	Yes	No
Comprehensive SR Storage	1.2.840.10008.5.1.4.1.1.88.33	No	No	Yes	No



SOP Classes	SOP Class UID	User of (SC	Service CU)	Provider (of Service CP)
Procedure Log Storage 1.2.840.10008.5.1.4.1.1.88.40 Storage		No	No	Yes	No
Mammography CAD SR Storage	1.2.840.10008.5.1.4.1.1.88.50	No	No	Yes	No
Key Object Selection Docu- ment Storage	1.2.840.10008.5.1.4.1.1.88.59	No	No	Yes	No
X-Ray Radiation Dose SR Storage	1.2.840.10008.5.1.4.1.1.88.67	No	No	Yes	No
Encapsulated PDF Storage SOP Class	1.2.840.10008.5.1.4.1.1.104.1	No	No	Yes	No
Positron Emission Tomogra- phy Image Storage	1.2.840.10008.5.1.4.1.1.128	No	No	Yes	No
RT Image Storage	1.2.840.10008.5.1.4.1.1.481.1	No	No	Yes	No
RT Dose Storage	1.2.840.10008.5.1.4.1.1.481.2	No	No	Yes	No
RT Structure Set Storage	1.2.840.10008.5.1.4.1.1.481.3	No	No	Yes	No
RT Beams Treatment Record Storage	1.2.840.10008.5.1.4.1.1.481.4	No	No	Yes	No
RT Plan Storage	1.2.840.10008.5.1.4.1.1.481.5	No	No	Yes	No
RT Treatment Summary Record Storage	1.2.840.10008.5.1.4.1.1.481.7	No	No	Yes	No
Digital Intra-Oral X-Ray Image Storage - For Presentation	1.2.840.10008.5.1.4.1.1.1.3	No	No	Yes	No
Digital Intra-Oral X-Ray Image Storage - For Processing	1.2.840.10008.5.1.4.1.1.1.3.1	No	No	Yes	No
Nuclear Medicine Image Storage	1.2.840.10008.5.1.4.1.1.20	No	No	Yes	No
Enhanced PET Image Storage	1.2.840.10008.5.1.4.1.1.130	No	No	Yes	No
Enhanced US Volume Storage	1.2.840.10008.5.1.4.1.1.6.2	No	No	Yes	No
Transfer (Private SOP Class)					
Syngo Non-Image Storage 1.3.12.2.1107.5.9.1		N	0	Ye	es
Query/Retrieve					
Study Root Q/R - Infor- mation Model - FIND	1.2.840.10008.5.1.4.1.2.2.1	Yes No		0	
Study Root Q/R - Infor- mation Model - MOVE	1.2.840.10008.5.1.4.1.2.2.1	Yes No		0	

Print Management not supported

Media Services are not supported

Table 2 - Implementation Identifying Information

Name	Value
Application Context Name	1.2.840.100008.3.1.1.1



Table of Contents

1	DICOM Conformance Statement Overview	
2	Table of Contents	5
3	Introduction	7
3.1	Audience	7
3.2	Remarks	7
3.3	Definitions, Terms and Abbreviations	8
3.4	References	8
4	Networking	9
4	Implementation Model	10 11
4.2 4	Application Entity Specification	
4	Network Interfaces 3.1 Physical Network Interface 3.2 Additional Protocols 3.3 IPv4 and IPv6 Support	20
	Configuration	20
5	Media Interchange	22
5 5	Implementation Model	22 22 22
5.2 5	AE SPECIFICATIONS	
5.3 5	AUGMENTED AND PRIVATE APPLICATION PROFILES	
5.4	MEDIA CONFIGURATION	23
6	Support of Extended Character Sets	24
6.1	Character sets for teamplay Q/R	24
7	Attribute confidentiality profiles	26
7 1	De-identification	26



8	Security	26
8.1	Security Profiles	26
8.2	Association Level Security	26
8.3	Application Level Security	26
9	Annexes	26
9.1	IOD Contents	26
9.2	Data Dictionary of Private Attributes	27
9.3	Coded Terminology and Templates	27
9.3	3.1 Context Groups	27
9.3	3.2 Template Specifications	
9.3	3.3 Private Code definitions	
9.4	Grayscale Image Consistency	27
9.5	Standard Extended / Specialized / Private SOP Classes	27
9.6	Private Transfer Syntaxes	27



3 Introduction

3.1 Audience

This document is intended for hospital staff, health system integrators, software designers or implementers. It is assumed that the reader has a working understanding of DICOM.

3.2 Remarks

The scope of this DICOM Conformance Statement is to facilitate integration between *teamplay Query/Retrieve* and other DICOM products. The Conformance Statement should be read and understood in conjunction with the DICOM Standard (Digital Imaging and Communication in Medicine (DICOM)). DICOM by itself does not guarantee interoperability.

The Conformance Statement does, however, facilitate a first-level comparison for interoperability between different applications supporting compatible DICOM functionality.

This Conformance Statement is not supposed to replace validation with other DICOM equipment to ensure proper exchange of intended information. In fact, the user should be aware of the following important issues:

- The comparison of conformance statements is the first step towards assessing interconnectivity and interoperability between teamplay Receiver and other DICOM conformant equipment.
- Test procedures should be defined and executed to validate the required level of interoperability with specific compatible DICOM equipment, as established by the healthcare facility.

Siemens Healthineers reserves the right to modify the design and specifications contained herein without prior notice. Please contact your local Siemens Healthineers representative for the most recent product information.



3.3 Definitions, Terms and Abbreviations

Definitions, terms and abbreviations used in this document are defined within the different parts of the DICOM standard.

Additional Abbreviations and terms are as follows:

AE DICOM Application Entity
AET Application Entity Title

ASCII American Standard Code for Information Interchange

DCS DICOM Conformance Statement

DICOM Digital Imaging and Communications in Medicine

FSC File Set Creator FSR File Set Reader FSU File Set Updater

GSDF Grayscale Standard Display Function IOD DICOM Information Object Definition ISO International Standard Organization

n. a. not applicable

NEMA National Electrical Manufacturers Association

O Optional Key Attribute
PDU DICOM Protocol Data Unit

Q/R Query/Retrieve R Required Key Attribute

SCU DICOM Service Class User (DICOM client)
SCP DICOM Service Class Provider (DICOM Server)

SOP DICOM Service-Object Pair

SR Structured Report

TFT Thin Film Transistor (Display)

TID Template ID

U Unique Key Attribute
UID Unique Identifier

UTF-8 Unicode Transformation Format-8

VR Value Representation

3.4 References

[1] NEMA PS3 / ISO 12052, Digital Imaging and Communications in Medicine (DICOM) Standard, National Electrical Manufacturers Association, Rosslyn, VA, USA (available free at https://www.dicomstand-ard.org/)



4 Networking

4.1 Implementation Model

Verification

Verification requests will be processed and responded by the teamplay Q/R AE. The AE can also initiate an association and request verification to a remote AE.

Storage

The teamplay Q/R AE Storage SCP starts to receive the Information Objects and store them on file system after accepting an association with a negotiated Presentation Context.

Query

The teamplay Q/R AE supports the Query/Retrieve services in a SCU role. The C-FIND request to the remote SCP is invoked by teamplay.

Retrieve

The teamplay Q/R AE initiates a C-MOVE request to the remote Retrieve SCP. The remote Retrieve SCP in turn starts C-STORE sub operations to the teamplay Storage SCP. The teamplay Q/R AE supports Study Root - Query/Retrieve Information model as SCU.



4.1.1 Application Data Flow

The following figures provide a functional overview of the teamplay Q/R Application Entity (AE). Relationships are shown between user-invoked activities (in the circles at the left of the AEs) and the associated real-world activities provided by DICOM service providers (in the circles at the right of the AEs)

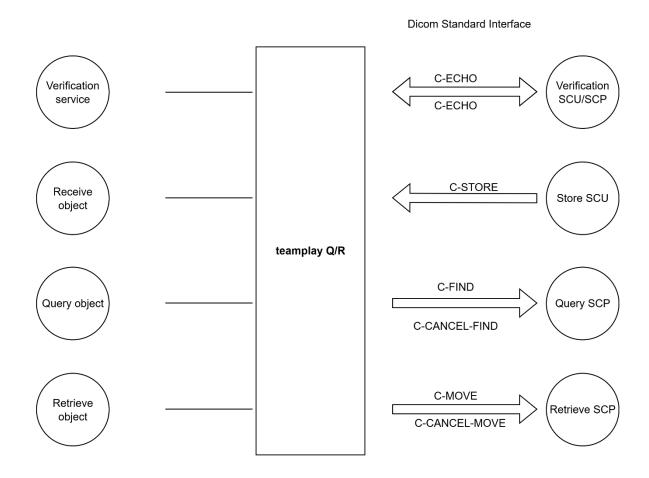


Figure 4.1-1: Application Data Flow Diagram teamplay Q/R AE

- The teamplay DICOM service opens an association when a "verification" of a remote application is requested during a configuration session. This can be done when entering new data to configure a remote application or to verify existing configuration data.
- The Storage SCP of the teamplay Q/R AE can receive incoming DICOM images and add them to the local database. It can respond to external Storage and Verification Requests as a Service Class Provider (SCP) for C-STORE and C-ECHO requests.
- The Query part of the Query SCU teamplay Q/R AE uses C-FIND to search a remote SCP for Patient Study and Series information.
- The teamplay Q/R AE initiates a C-MOVE request to the remote Retrieve SCP. The remote Retrieve SCP in turn starts C-STORE sub operations to the teamplay Storage SCP.



4.1.2 Functional Definitions of Application Entities

The *teamplay Receiver* operate as background server processes. Upon accepting an association with a negotiated Presentation Context, it starts to receive and process requests.

4.1.2.1 Functional Definition of teamplay AE

The teamplay Q/R AE can initiate verification requests to remote AE title as well as respond to verification requests from remote AEs.

The teamplay Q/R AE Storage SCP receives the Information Objects and stores them on file system after accepting an association with a negotiated Presentation Context. Once stored on the file system a file uploader will upload the same to cloud storage and the local copy on file system will be deleted.

The teamplay Q/R AE supports the Study Root Query/Retrieve Information Model - FIND as an SCU. The C-FIND request to a remote SCP is invoked directly by teamplay Q/R AE for analytics offerings. The remote SCP returns a list of responses with defined data (which can be displayed to the user). The teamplay Q/R AE initiates a C-MOVE request to the remote Retrieve SCP. The remote Retrieve SCP in turn starts C-STORE sub operations to the teamplay Q/R AE Storage SCP. The teamplay Q/R AE supports the Study Root Query/Retrieve Information Model - MOVE as an SCU.

For supported storage SOP Classes or Data Objects refer to the "Conformance Statement Overview".



4.1.3 Sequencing of Activities

4.1.3.1 Verification

The communication between teamplay Q/R AE and an external DICOM node in case of Verify is depicted in Figure 4.1-2 in more detail.

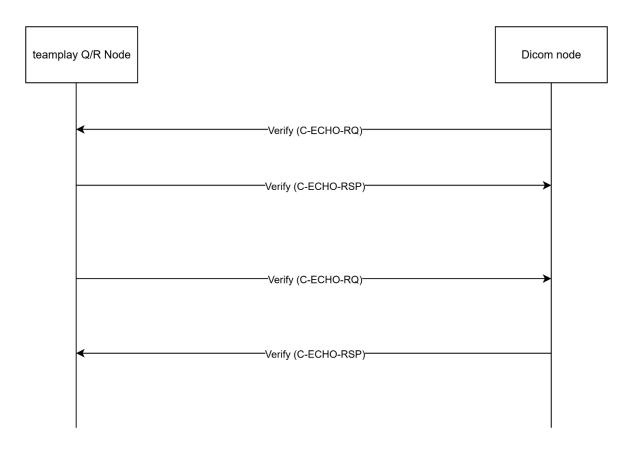


Figure 4.1-2: Sequence diagram – Verify



4.1.3.2 Storage

The communication between teamplay Q/R AE and an external DICOM node in case of triggering the transfer of objects to the teamplay Receiver from the external node is depicted in Figure 4.1-3 in more detail.

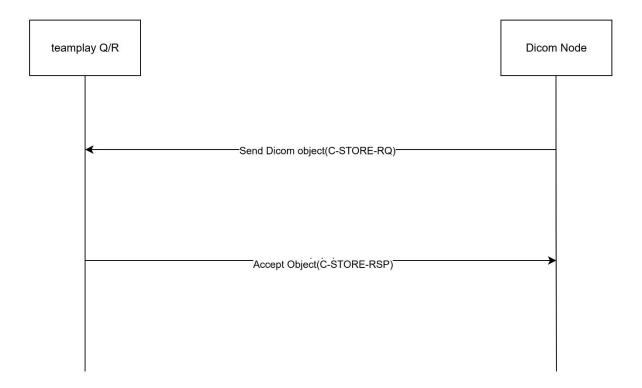


Figure 4.1-3: Sequence diagram – Storage



4.1.3.3 Query / Retrieve

The communication between the teamplay Q/R AE and an external DICOM node in case of querying for objects from a remote DICOM node and retrieving to the teamplay Receiver is depicted in Figure 4.1-4 in more detail.

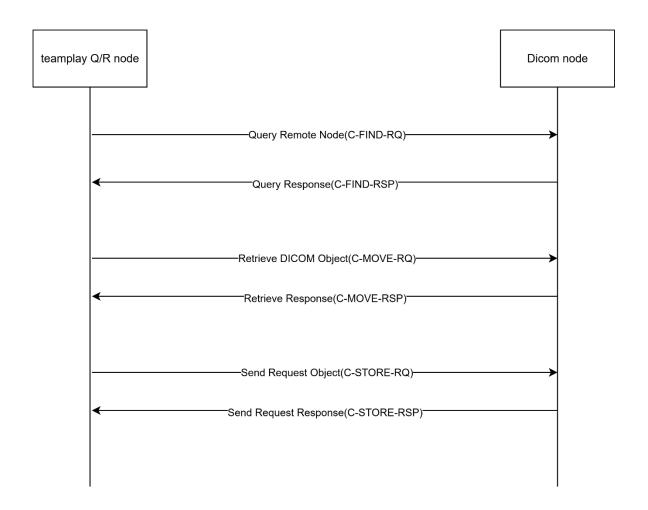


Figure 4.1-4: Sequence diagram – Query/Retrieve



4.2 Application Entity Specification

This section outlines the specifications for the Application Entity that is part of the teamplay Receiver.

4.2.1 teamplay AE Specification

4.2.1.1 SOP Classes

The teamplay Q/R AE provides standard conformance to the SOP Class listed in "Table 1: Network Services" section "Verification" in the "Conformance Statement Overview".

4.2.1.2 Association Policy

The association policies for the teamplay Q/R AE listed in table 4-1.

Table 4-1: Association Policies

Application Context Name	1.2.840.10008.3.1.1.1
PDU size	64 kB
Maximum number of simultaneous associations as an association acceptor	Unlimited
Maximum number of simultaneous associations as an association initiator	Unlimited

4.2.1.2.1 Asynchronous Nature

The *teamplay Receiver* DICOM software does not support asynchronous communication (multiple outstanding transactions over a single association).

4.2.1.2.2 Implementation Identifying Information

For Implementation Identifying Information please refer to "Table 2 - Implementation Identifying Information" in the "Conformance Statement Overview".



4.2.1.3 Association Initiation Policy

4.2.1.3.1 Activity – "Send Verification" Request

4.2.1.3.1.1 Description and Sequencing of Activities

The Verification SCU C-ECHO request is initiated by Service and Configuration SW whenever "Verification" is requested. If an association to a remote Application Entity is successfully established, Verification with the configured AET is requested via the open association. If the C-ECHO Response from the remote Application contains a status other than "Success", will be indicated in the service environment and the association is closed.

4.2.1.3.1.2 Proposed Presentation Contexts

The *teamplay Receiver* DICOM application will propose Presentation Contexts as shown in the following table:

Table 4-2 - Presentation Context Table "Verification"

	Presentation Context Table – "Verification"					
Abstract Syntax Transfer Syntax			Role	Extended		
Name	UID	Name List	UID List	Kole	Negotiation	
Verification	1.2.840.10008.1.1	Explicit VR Little Endian Implicit VR Little Endian Explicit VR Big Endian		SCU	None	

4.2.1.3.1.3 SOP specific Conformance for SOP classes – Verification SCU

The Application conforms to the definition of the Verification SCU in accordance with the DICOM Standard.

4.2.1.3.2 Activities "Query a Remote Node for Instances" / "Retrieve Instances from a remote node"

4.2.1.3.2.1 Description and Sequencing of Activities

The teamplay Q/R AE serves as a SCU for the following SOP Classes

• Study Root Q/R Information Model –FIND SOP Class

The associated Real-World activity is a C-Find request initiated by the user teamplay Q/R AE. The user specifies some attributes and will send a C-Find request (according to the query model) and will then return the results to the initiating application.

• Study Root Q/R Information Model –MOVE SOP Class

The Retrieve request(C-MOVE) is initiated for the C-FIND results.



4.2.1.3.2.2 Proposed Presentation Contexts

The teamplay Q/R AE will propose Presentation Contexts as shown in the following table:

Table 4-3: Proposed Presentation Contexts for Query/Retrieve

	Presentation Context Table					
Abstract Syntax		Transfer Syntax		Role	Ext. Neg.	
Name	UID	Name List	UID List			
Study Root		Implicit VR Little Endian	1.2.840.10008.1.2			
Query/ Retrieve	1.2.840.10008.5.1.4.1.	Explicit VR Little Endian	1.2.840.10008.1.2.1	CCLI	No	
Information 2.2.1 Model - FIND		Explicit VR Big Endian	1.2.840.10008.1.2.2	SCU	No	
Study Root Query/	1.2.840.10008.5.1.4.1.	Implicit VR Little Endian	1.2.840.10008.1.2	SCU	No	
Retrieve Infor-	2.2.2	Explicit VR Little Endian	1.2.840.10008.1.2.1			
mation Model – MOVE		Explicit VR Big Endian	1.2.840.10008.1.2.2			

4.2.1.3.2.3 SOP Specific Conformance Statement to Query / Retrieve SOP classes

The teamplay Q/R AE supports the following query levels:

Study

Matching Keys on Series and Instance Levels are not supported by teamplay Receiver as SCU.

The teamplay Q/R AE checks for the following status codes in the Query SCP's C-FIND-Response:

Table 4-4: C-FIND DICOM status codes

Service Status	Further Meaning	Error Code	Behavior
Error	e.g. Out of Resources; Cancellation; Identifier does not match SOP Class; Unable to process	Any; none; null; Code	Log message is created
	All optional keys are supported the same manner as Required Keys.	FF00	Log message is created
Pending	Matching Operation continues; some of the optional keys were not supported the same way as the required keys	FF01	Log message is created
Success	Query has been performed successfully.	0000	Query request is sent success-



The teamplay Q/R AE checks for the following status codes in the Retrieve SCP's C-MOVE-Response:

Table 4-5: C-MOVE DICOM status codes

Service Status	Further Meaning	Error Code	Behavior
	Out of Resources - Unable to calculate number of matches	A701	Retrieve will be retried again after some time.
Refused	Out of Resources - Unable to perform sub operations	A702	Retrieve will be retried again after some time.
	Move destination unknown	A801	Retrieve will be retried again after some time.
E. H. J	Identifier does not match SOP Class	A900	N.A.
Failed	Unable to process	Сххх	Retrieve will be retried again after some time.
Cancel	Sub-operations terminated due to Cancel Indication	FE00	Retrieve will be retried again after some time.
Warning	Sub-operations Complete - One or more Failures of Warnings	B000	Data is processed for teamplay.
Success	Sub-operations Complete - No Failures or Warning	0000	Data is processed for teamplay.
Pending	Sub-operations are continuing	FF00	Wait for comple- tion.

Table 4-6: Query/Retrieve DICOM Command Communication Failure Behavior

Exceptions	Behavior
Timeout	Log message is created. (default timeout value is 30 seconds)
Association Aborted	Log message is created.

4.2.1.4 Association Acceptance Policy

4.2.1.4.1 Activity - "Receive Storage Request"

4.2.1.4.1.1 Description and Sequencing of Activities

The teamplay Q/R AE receiving process will accept an association, receive any objects transmitted on that association and store the objects on disk.

4.2.1.4.1.2 Accepted Presentation Contexts

For all supported Transfer objects (see SOP Classes in the "Conformance Statement Overview"). the Transfer Syntaxes described in Table 4-7 are supported.

Generally, all Presentation Contexts are accepted as long as they contain at least one suitable Transfer syntax specified in table 4.3.



Table 4-7: Available Transfer Syntax

Presentation Context Presentation Context	Transfer Syntax UID
Explicit Value Representation Little Endian	1.2.840.10008.1.2.1
Implicit Value Representation Little Endian	1.2.840.10008.1.2
Explicit Value Representation Big Endian	1.2.840.10008.1.2.2
JPEG Lossless, Non-Hierarchical, First-Order Prediction (Process 14)	1.2.840.10008.1.2.4.70
JPEG 2000 Image Compression (Lossless Only)	1.2.840.10008.1.2.4.90
RLE Lossless	1.2.840.10008.1.2.5
JPEG Extended (Process 2 & 4)	1.2.840.10008.1.2.4.51
JPEG Baseline (Process 1)	1.2.840.10008.1.2.4.50
JPEG 2000 Image Compression	1.2.840.10008.1.2.4.91

4.2.1.4.1.3 SOP specific Conformance for SOP classes

In case of a successful C-STORE operation, the image has successfully been written to disk. The Storage teamplay Q/R AE return the status "success" when the data is stored to disk and a minimal image header validation has been performed. After a successful storage to disk, the upload functionality will upload the same data into the teamplay cloud blob storage using non-DICOM communication. The copy on the disk will be deleted upon successful upload.

The following header attributes must be available and filled:

- Patient Name (0010,0010)
- Study Instance UID (0020,000D)
- Series Instance UID (0020,000E) and
- SOP Instance UID (0008, 0018).

The C-STORE response codes that are available for the Storage are described in the table 4-8.

Table 4-8: Storage C-STORE Response Status

Service Status	Further Meaning	Error Code	Reason
Success	Success	0000	Image received correctly (success notification is done after re- ceiving, before indexing and storing)
Failure	Out-of-resource	A700	No resource left in the storage
Failure	Unable to Process	Сххх	Error during instance reception
Failure	Dataset does not match SOP Class	А9хх	The Dataset is not conformed to the SOP Class contained in the resource.



4.3 Network Interfaces

4.3.1 Physical Network Interface

The teamplay Q/R provides DICOM 3.0 TCP/IP network communication support as defined in Part 8 of [1]. The network communication is independent from the physical medium over which TCP/IP executes; it inherits this from the Windows OS system upon which it executes.

4.3.2 Additional Protocols

N/A

4.3.3 IPv4 and IPv6 Support

Only IPv4 support is provided in this version.

4.4 Configuration

4.4.1 AE Title/Presentation Address Mapping

AE Titles shall be unique within the hospital. A common way to achieve that is to use the hostname as part of the AE Titles. The string can be up to 16 characters and must not contain any extended characters. Only 7-bit ASCII characters (excluding Control Characters) are allowed according to DI-COM [1].

4.4.1.1 Local AE Titles

The teamplay Q/Rr allows configuring the AETitle and the related Port.

Table 4-9: Default Local Analytics teamplay Q/R AE Title

Parameter	Configurable	Default Value
Default AE title	Yes	hostname in uppercase characters; limited to 16 characters
Default Port	Yes	104



4.4.1.2 Remote AE Title / Presentation Address Mapping

4.4.1.2.1 Remote SCU's

All relevant remote applications that may initiate DICOM associations with teamplay Receiver need to be configured in the *teamplay Q/R*, before the association can be established.

The mapping of external AE Titles to TCP/IP addresses and ports is configurable and initially set at the time of installation. Changes can also be performed later. The Application Entity Title and supported transfer syntaxes need to be known for configuration.

4.4.1.2.2 Remote SCP's

Remote applications can accept DICOM associations from the *teamplay Q/R*, the following information needs to be available:

- · Application Entity Title
- Host Name / IP address on which the remote application service runs
- Port number on which the remote application accepts association requests.

4.4.2 Parameters

There are no additional parameters to be configured.



5 Media Interchange

5.1 Implementation Model

The teamplay Receiver does not support Media Storage.

5.1.1 Application Data Flow Diagram

N/A

5.1.2 Functional definitions of AEs

N/A

5.1.3 Sequencing of Real-World Activities

N/A

5.1.4 File Meta Information for Implementation Class and Version

N/A

- 5.2 AE SPECIFICATIONS
- 5.2.1 Media Storage AE Specification

N/A

5.2.1.1 Real-World Activities

N/A

5.2.1.2 SOP Classes and Transfer Syntaxes

N/A

5.3 AUGMENTED AND PRIVATE APPLICATION PROFILES

N/A

5.3.1 Augmented Application Profiles

N/A



5.4 MEDIA CONFIGURATION

N/A



6 Support of Extended Character Sets

6.1 Character sets for teamplay Q/R

The *teamplay Q/R* DICOM application supports the following character sets as defined in the four tables below.

Table 6-1: Single-Byte Character Sets without Code Extension

Character Set	Defined Term	ISO registration	Character Set
Description		number	
Default repertoire	None	ISO_IR 6	ISO 646
Latin alphabet No. 1	ISO_IR 100	ISO_IR 100	Supplementary set
Latiii aipiiabet No. 1	130_11(100	ISO_IR 6	ISO 646
Latin alphabet No. 2	ISO_IR 101	ISO_IR 101	Supplementary set
Latiii aipiiabet No. 2	130_11(101	ISO_IR 6	ISO 646
Latin alphabet No. 3	ISO_IR 109	ISO_IR 109	Supplementary set
Latiii aipiiabet No. 3	130_11(109	ISO_IR 6	ISO 646
Latin alphabat No. 4	ISO_IR 110	ISO_IR 110	Supplementary set
Latin alphabet No. 4	130_IK 1 10	ISO_IR 6	ISO 646
Cyrillic	ISO_IR 144	ISO_IR 144	Supplementary set
Cyrillic		ISO_IR 6	ISO 646
Arabic	ISO_IR 127	ISO_IR 127	Supplementary set
Alabic	130_IR 127	ISO_IR 6	ISO 646
Crook	ICO ID 124	ISO_IR 126	Supplementary set
Greek	ISO_IR 126	ISO_IR 6	ISO 646
Hebrew	ISO ID 120	ISO_IR 138	Supplementary set
nebrew	ISO_IR 138	ISO_IR 6	ISO 646
latin alabahat Na F	ICO ID 140	ISO_IR 148	Supplementary set
Latin alphabet No. 5	ISO_IR 148	ISO_IR 6	ISO 646
lananaa	ICO ID 12	ISO_IR 13	JIS X 0201: Katakana
Japanese	ISO_IR 13	ISO_IR 14	JIS X 0201: Romaji
T	100 10477	ISO_IR166	TIS 620-253 (1990)
Thai	ISO_IR166	ISO_IR 6	ISO 646



Table 6-2: Single-Byte Characters Sets with Code Extension

Character Set De- scription	Defined Term	Standard for Code Extension	ESC sequence	ISO registration number	Character Set
Default repertoire	ISO 2022 IR 6	ISO 2022	ESC 02/08 04/02	ISO-IR 6	ISO 646
Latin alphabet	ICO 2022 ID 102	ISO 2022	ESC 02/13 04/01	ISO-IR 100	Supplementary set
No.1 ISO 2022 IR 100	ISO 2022	ESC 02/08 04/02	ISO-IR 6	ISO 646	
Latin alphabet	abet ISO 2022 IR 101	ISO 2022	ESC 02/13 04/02	ISO-IR 101	Supplementary set
No.2		ISO 2022	ESC 02/08 04/02	ISO-IR 6	ISO 646
Latin alphabet No.3	ISO 2022 IR 109	ISO 2022	ESC 02/13 04/03	ISO-IR 109	Supplementary set
		ISO 2022	ESC 02/08 04/02	ISO-IR 6	ISO 646
Latin alphabet No.4	ISO 2022 IR 110	ISO 2022	ESC 02/13 04/04	ISO-IR 110	Supplementary set
INU.4		ISO 2022	ESC 02/08 04/02	ISO-IR 6	ISO 646

Multi-Byte Character Sets without Code Extension

Table 6-3: Multi-Byte Character Sets without Code Extension

Character Set Description	Defined Term	ISO registration number	Character Set
Unicode	ISO_IR 192	ISO 10646	Unicode in UTF-8
Chinese	GB18030	GB18030	GB 18030-2000 (China Association for Standardization)

Table 6-4: Multi-Byte Character Sets with Code Extension

Character Set Description	Defined Term	Standard for Code Exten- sion	ESC sequence	ISO registration number	Character Set
Japanese	ISO 2022 IR 159	ISO 2022	ESC 02/04 02/08 04/04	ISO-IR 159	JIS X 0212: Supplementary Kanji set
Korean	ISO 2022 IR 149	ISO 2022	ESC 02/04 02/09 04/03	ISO-IR 149	KS X 1001: Hangul and Hanja

All SCS (Special Character Sets) listed above are supported for incoming Data.



When there is a mismatch between the given character set in attribute (0008,0005) and the characters in an IOD received by the system, then the following measures are taken to make the characters DICOM conform:

• Convert each illegal character to a '?'.

There are now three categories of character sets which have to be differentiated because of their different encoding formats:

- Conventional ISO character sets: ISO_IR 6, ISO 2022 IR 6, ISO_IR 100, etc. → encoded in ISO 2022
- ISO_IR 192 →encoded in UTF-8
- GB18030 → encoded in GB18030

It is not possible to recognize the following mismatches automatically on receiving or importing:

- An attribute value is encoded in ISO_IR 192 $\leftarrow \rightarrow$ (0008,0005) contains a conventional ISO character set as primary character set
- An attribute value is encoded in GB18030 $\leftarrow \rightarrow$ (0008,0005) contains a conventional ISO character set as primary character set
- An attribute value is encoded in ISO 2022 ← → (0008,0005) contains ISO_IR 192
- An attribute value is encoded in ISO 2022 ← → (0008,0005) contains GB18030

An IOD that contains one of the above mentioned inconsistencies does not conform to DICOM. As these kinds of inconsistencies cannot be recognized by the system, the IOD will not be rejected but the character data might be corrupted.

The teamplay Receiver supports Kanji characters in the byte zone after 74 (79, 7A, 7B and 7C).

7 Attribute confidentiality profiles

7.1 De-identification

The teamplay Q/R can de-identify attributes using proprietary mechanisms.

8 Security

8.1 Security Profiles

The *teamplay Q/R* does not support any specific security measures.

8.2 Association Level Security

It is possible to configure whether the SCP will only answer to known AETs or to any AET.

8.3 Application Level Security

N/A

9 Annexes

9.1 IOD Contents



N/A

9.2 Data Dictionary of Private Attributes

N/A

9.3 Coded Terminology and Templates

N/A

9.3.1 Context Groups

N/A

9.3.2 Template Specifications

N/A

9.3.3 Private Code definitions

Attribute Name	Attribute Tag	VR	VM	Private Creator Code
Private Creator ID	(0031, 00xx)	LO	1	Constant value "SIEMENS SY CLOUD". Reserve elements in block (0031, xx00-xxFF)
Snapshot	(0031, xx01)	LT	1	The value present in this field represent the deidentification rules applied.
Toolkit version	(0031, xx02)	LO	1	The value present in the field represent the version of the toolkit that performed the deidentification

9.4 Grayscale Image Consistency

N/A

9.5 Standard Extended / Specialized / Private SOP Classes

N/A

9.6 Private Transfer Syntaxes

None



On account of certain regional limitations of sales rights and service availability, we cannot guarantee that all products included in this brochure are available through the Siemens sales organization worldwide. Availability and packaging may vary by country and are subject to change without prior notice.

Some/All of the features and products described herein may not be available in the United States or other countries.

The information in this document contains general technical descriptions of specifications and options as well as standard and optional features that do not always have to be present in individual cases.

Siemens reserves the right to modify the design, packaging, specifications and options described herein without prior notice. Please contact your local Siemens sales representative for the most current information.

In the interest of complying with legal requirements concerning the environmental compatibility of our products (protection of natural resources and waste conservation), we recycle certain components. Using the same extensive quality assurance measures as for factorynew components, we guarantee the quality of these recycled components.

Note: Any technical data contained in this document may vary within defined tolerances. Original images always lose a certain amount of detail when reproduced.

Siemens Healthineers Headquarters Siemens Healthineers AG Siemensstr. 3 91301 Forchheim, Germany Phone: +49 9191 18-0 siemens-healthineers.com